



# KuMax

## CS3U-350|355|360|365P

**HIGH EFFICIENCY POLY MODULE**  
(1000 V / 1500 V)

With Canadian Solar's industry leading poly cell technology and the innovative LIC (Low Internal Current) module technology, we are now able to offer our global customers high power poly modules up to 365 W. The KuMax poly modules with a dimension of 2000 x 992 mm, close to our 72 cell MaxPower modules, have the following features:

### MORE POWER



**Low power loss in cell connection**



**Low NMOT: 42 ± 3 °C**  
**Low temperature coefficient (Pmax): -0.37 % / °C**



**Better shading tolerance**



**High PTC rating of up to: 92.64 %**

### MORE RELIABLE



**Lower hot spot temperature**




**Minimizes micro-cracks**



**Heavy snow load up to 5400 Pa,**  
**wind load up to 2400 Pa**

\*For detail information, please refer to Installation Manual.

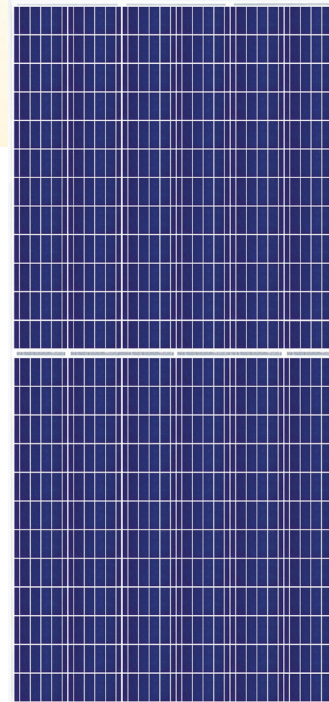

**power output warranty**



**product warranty on materials and workmanship**

### MANAGEMENT SYSTEM CERTIFICATES\*

ISO 9001:2008 / Quality management system

ISO 14001:2004 / Standards for environmental management system

OHSAS 18001:2007 / International standards for occupational health & safety

### PRODUCT CERTIFICATES\*

IEC 61215 / IEC 61730: VDE / CE

UL 1703: CSA

\* As there are different certification requirements in different markets, please contact your local Canadian Solar sales representative for the specific certificates applicable to the products in the region in which the products are to be used. If module installations are to deviate from the guidance specified in our installation manual, please contact your local Canadian Solar technical representatives.


**CANADIAN SOLAR (USA), INC.** is committed to providing high quality solar products, solar system solutions and services to customers around the world. As a leading PV project developer and manufacturer of solar modules with over 26 GW deployed around the world since 2001, Canadian Solar Inc. (NASDAQ: CSIQ) is one of the most bankable solar companies worldwide.

### CANADIAN SOLAR (USA), INC.


3000 Oak Road, Suite 400, Walnut Creek, CA 94597, USA | [www.canadiansolar.com/na](http://www.canadiansolar.com/na) | [sales.us@canadiansolar.com](mailto:sales.us@canadiansolar.com)

## ENGINEERING DRAWING (mm)


### Rear View

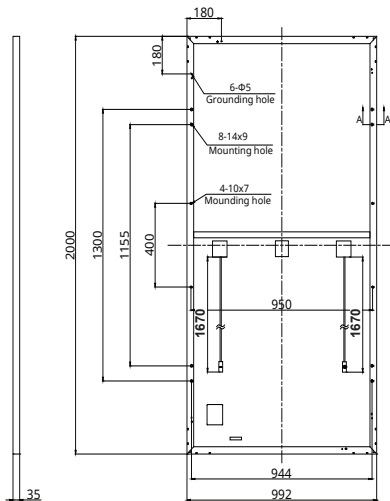


### Frame Cross Section A-A



### Mounting Hole



## CS3U-355P / I-V CURVES

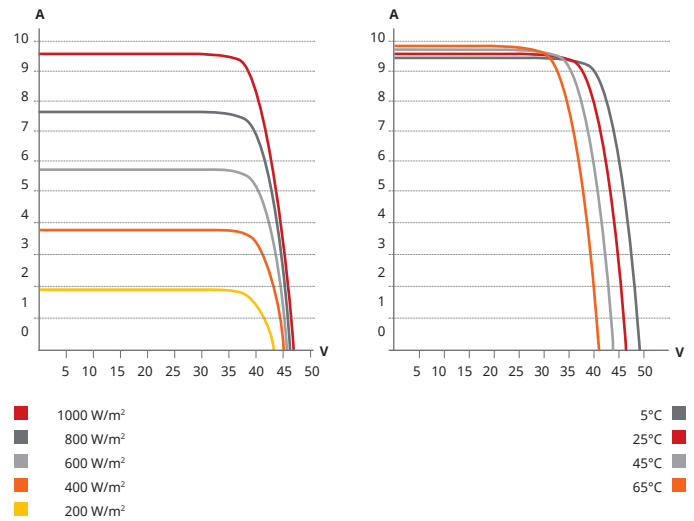

## ELECTRICAL DATA | STC\*

CS3U	350P	355P	360P	365P
Nominal Max. Power (P <sub>max</sub> )	350 W	355 W	360 W	365 W
Opt. Operating Voltage (V <sub>mp</sub> )	39.2 V	39.4 V	39.6 V	39.8 V
Opt. Operating Current (I <sub>mp</sub> )	8.94 A	9.02 A	9.10 A	9.18 A
Open Circuit Voltage (V <sub>oc</sub> )	46.6 V	46.8 V	47.0 V	47.2 V
Short Circuit Current (I <sub>sc</sub> )	9.51 A	9.59 A	9.67 A	9.75 A
Module Efficiency	17.64%	17.89%	18.15%	18.40%
Operating Temperature	-40°C ~ +85°C			
Max. System Voltage	1500V (IEC/UL) or 1000V (IEC/UL)			
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)			
Max. Series Fuse Rating	30 A			
Application Classification	Class A			
Power Tolerance	0 ~ + 5 W			

\* Under Standard Test Conditions (STC) of irradiance of 1000 W/m<sup>2</sup>, spectrum AM 1.5 and cell temperature of 25°C.

## ELECTRICAL DATA | NMOT\*

CS3U	350P	355P	360P	365P
Nominal Max. Power (P <sub>max</sub> )	260 W	264 W	268 W	271 W
Opt. Operating Voltage (V <sub>mp</sub> )	36.2 V	36.4 V	36.6 V	36.8 V
Opt. Operating Current (I <sub>mp</sub> )	7.18 A	7.25 A	7.31 A	7.38 A
Open Circuit Voltage (V <sub>oc</sub> )	43.7 V	43.9 V	44.1 V	44.3 V
Short Circuit Current (I <sub>sc</sub> )	7.67 A	7.74 A	7.80 A	7.87 A

\* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m<sup>2</sup>, spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

\* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustment to the information described herein at any time without further notice.

## MECHANICAL DATA

Specification	Data
Cell Type	Poly-crystalline, 156.75 X 78.38 mm
Cell Arrangement	144 [2 X (12 X 6)]
Dimensions	2000 X 992 X 35 mm (78.7 X 39.1 X 1.38 in)
Weight	22.5 kg (49.6 lbs)
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminium alloy, crossbar enhanced
J-Box	IP68, 3 diodes
Cable	4 mm <sup>2</sup> (IEC), 12 AWG (UL)
Cable Length	1670 mm (65.7 in)
Connector	T4 series
Per Pallet	30 pieces
Per Container (40' HQ)	660 pieces

## TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (P <sub>max</sub> )	-0.37 % / °C
Temperature Coefficient (V <sub>oc</sub> )	-0.29 % / °C
Temperature Coefficient (I <sub>sc</sub> )	0.05 % / °C
Nominal Module Operating Temperature	42 ± 3°C

## PARTNER SECTION

